



標準螺絲供應有限公司 (513831-P) STANDARD BOLTS & NUTS SDN. BHD.

No. 47 & 49, Jalan TPP 1/1, Taman Industri Puchong, 12th Miles,
47100 Puchong, Selangor Darul Ehsan, Malaysia.

Tel: 03-8062 3811 (Hunting Line)

Website: <http://www.standardbolts.net>

Fax: 03-8062 2230, 8068 2811


E-mail: sale@standardbolts.net



NAIL IN ANCHOR

Material

Steel


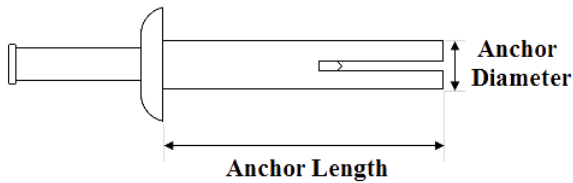


Anchor Diameter	Anchor Length	Fixture Hole Diameter	Max Fixture Thickness
M6	30MM	6.5MM	10MM
M6	40MM	6.5MM	20MM
M6	50MM	6.5MM	30MM

Anchor Size	Anchor Length	Drilled Hole Diameter	Minimum Hole Depth	Head Diameter	Minimum Concrete Thickness	Absolute Minimum Spacing & Edge Distance		Recommended Load (kN)			
								Concrete ¹		Solid Brick ²	
						Tension	Shear	Tension	Shear	Tension	Shear
M6	30MM	6MM	22MM	13MM	50MM	25MM	25MM	1.0	1.3	0.5	0.5
M6	40MM	6MM	22MM	13MM	50MM	25MM	25MM	1.0	1.3	0.5	0.5
M6	50MM	6MM	22MM	13MM	50MM	25MM	25MM	1.0	1.3	0.5	0.5

1) Loading based on standard embedment depth and non-cracked concrete, $f_{ck, cube} = 25 \text{ N/mm}^2$ (C20/25)

2) Load test is recommended to verify anchor performance on actual substrate.

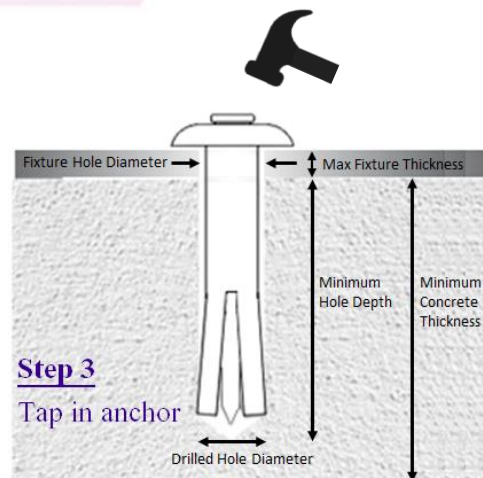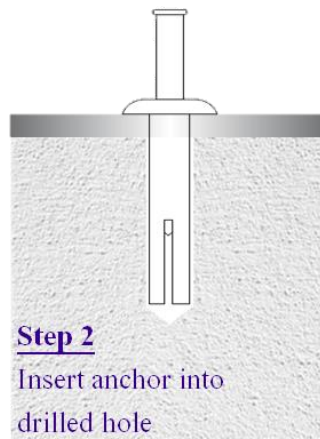

SBN Klang (Branch)

Standard Bolts & Nuts (Klang) Sdn Bhd
No. 135 & 137, Jalan Batu Tiga Lama,
Berkeley Town center, 41300 Klang,
Selangor Darul Ehsan, Malaysia
Tel: 03-3344 1198 (Hunting Line)
Fax: 03-3344 2811
Email: sbnk@standardbolts.net

SBN Sg Buloh (Branch)

Standard Bolts & Nuts (Sg. Buloh) Sdn Bhd
NO.5 & 7, Block D, Jalan Gelen J, U19/J,
Megamas Business Centre, Kg Baru Sg. Buloh,
47000 Sg. Buloh, Selangor Darul Ehsan, Malaysia
Tel: 03-6148 1198 (Hunting Line)
Fax: 03-6148 2811
Email: sbnbs@standardbolts.net

SBN Johor (Branch)

Standard Bolts & Nuts Supply Sdn Bhd
No. 12 & 14, Jalan Ros Merah 2/17,
Taman Johor Jaya,
81100 Johor Bahru, Johor.
Tel: 07-358 3221 (Hunting Line)
Fax: 07-364 9279
Email: sbnjb@standardbolts.net